



LeeWay Odyssey

Vessel Specifications

38 metres

9.1 m x 7.5 m working deck

20-person accommodations

Near Coastal 1 - 200 nm offshore operability

LeeWay
MARINE

A close-up photograph of a pair of hands, likely belonging to a person of African descent, holding a thick, light-colored rope. The hands are positioned in the center-right of the frame, with fingers wrapped around the rope. The rope is coiled and twisted, showing its texture. The background is a soft, out-of-focus grey. The overall tone is professional and suggests a maritime or industrial setting.

“

LeeWay Marine is the leading Atlantic Canadian marine data acquisition service company providing fully crewed offshore ships and inshore vessels with the region's most experienced technical team.

”



R/V LeeWay Odyssey



Profile

R/V Leeway Odyssey is a 38-metre all aluminum survey vessel with a beam of 8 metres. It is outfitted for year-round coastal service with around-the-clock operations.

Until being acquired by LeeWay Marine in 2015, she was owned and operated by the Canadian Coast Guard and Canadian Hydrographic Services since build. She was dry-docked in March 2016 and delegated to a Classification Society (RINA) by Transport Canada.

The vessel has a total compliment of 20 persons, which includes ship's crew of seven and scientific crew of 13 personnel. The vessel's accommodations can be expanded to 24 berths if required. Some reduced crewing options are also available under certain operating profiles.

The vessel is fully Transport Canada certified as Near Coastal 1, meeting all safety requirements and regulations with a Safety Management System and Preventative Maintenance Program in place. She can operate up to 200 nm offshore with modern navigational and electronics equipment.

Key Working Features

The vessel has a full open back deck for many types of support services in science and research development, bottom and core sampling, water sampling, ocean bottom mapping, resource protection recovery, fishing gear removal, buoy maintenance and inspections, ROV-Remote Vehicle Operations, training and education.

The main deck (9.1 m x 7.5 m) is fitted with a new hydraulic 3,400 kg WLL A Frame (3.4 m W x 4.3 m H) with 2.1m extension over the transom. Additionally, the main deck is fitted with a robust plated steel frame used for winch and equipment installations per the client's requirements. The frame is fitted with ISO locks in a 10' and 20' TEU container footprint.



Optionally, the main deck can be fitted with the Controlled Hydraulic Entry A-Frame Technology (CHEAT) System designed by LeeWay Marine to enable sensitive payloads (2,700 kg) to be lowered to the water interface using a dynamic A-Frame and hydraulic ramp control system. The system reduces risk to payloads and improves LAR in difficult sea conditions. The system is modular and can be removed within 1 hour if clients require an open deck configuration.

The main deck has a Telescoping Crane (1300kg WLL and 950Kg over the side), a side davit (450 kg WLL, 2.4 m from the starboard side, two pot haulers and two manual davits (225 kg WLL).

The ship's keel has a diver-installed Multi-Beam Sonar mounting carriage located 1/3 length from the bow.

An after control position with full view of the working deck enables efficient communication and synergy between the Master and the deck crew.

A laboratory (4.9 m x 3 m) serves as the data processing center and has server racks and cat 5 distribution architecture to all cabins/work stations, DGPS navigation feed and several data feed transits to the main deck.

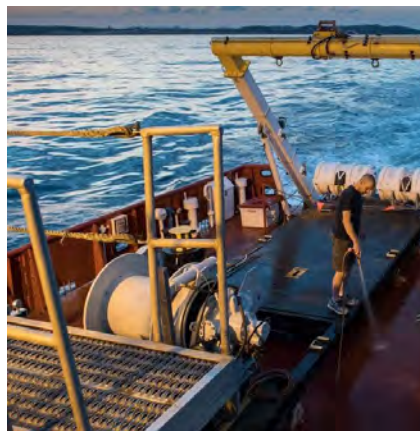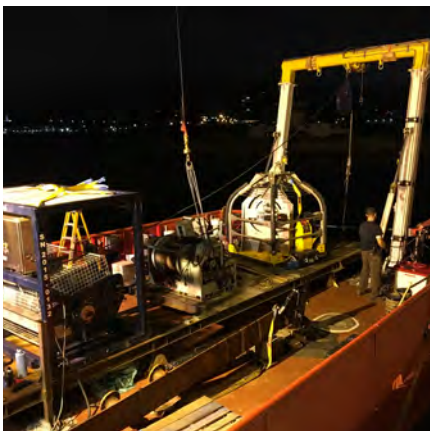

Operational Efficiencies

Leeway Odyssey has a cruising speed of 12 knots, with excellent slow speed handling and positioning. She has a boat launch and recovery system, as well as an A-Frame for all support services required.

Excellent fuel economy with approximately 250 l/h at transit and 130 l/h loiter speed.

She has a shallow draft of 2.4 m, which enables excellent operational coverage near shore. Her large metacentric height makes her exceptionally stable for blue-water operations.

Odyssey has a twin shaft, fixed-pitch propulsions system with a bow thruster. She has two new 125 KW CAT Diesel generators with ample surplus power to support any additional deck operations.

With 2 weeks of operational endurance, she is well equip for water storage, water production and waste processing.

Accommodations are well-appointed with single and double cabins throughout. Client cabins are equip with private heads/showers. SAT TV and CAT 5 networking infrastructure is distributed to each cabin. Ship internal telephones are located in each cabin.



Characteristics

Registry: Halifax, Nova Scotia 🇨🇦

Built: Port Hawkesbury, Nova Scotia

IMO Number: 7635995

Official Number: 370575

Call Sign: CG3159

MMSI Number: 316003090

Material: Aluminum

Year Built: 1976

Midlife Refit: 2006

Specifications

Length: 38 metres

Beam: 8.2 metres

Draft: 2.5 metres

Operating Depth: 3.5 metres

GRT: 346 tonnes

NRT: 81 tonnes

Cruising Speed: 12.5 knots

Cruising Range: 1,800 nm

Fuel Capacity: 53m³

Fresh Water: 31,00 litres + RO

Engines: 2x Cummins V12 Diesel

Power: 1,600 kw

Generators: 2x Cat Diesel 125 kw

Propulsion: Twin Props

Bow Thruster: 150 hp



Accommodations

Total Compliment: 20 persons

Crew: 7 persons

Scientific Crew: 13 persons

- All cabins have private washrooms and showers
- Private cabin reserved for Chief Scientist with private office and e-suite
- Full galley facilities with stainless steel cooking and refrigeration appliances
- Ship's mess with seating for full compliment
- Walk-in freezers and coolers
- Washer and dryer
- Satellite TV and internet access
- Inside wet and dry lab for all support services with cable and server infrastructure
- Ship's office

Working Deck

- 92 m² of total working space
- Deck pads to accommodate all equipment on deck
- A-Frame: 3,400 kg WLL, 4.3 m high, 3.4 m wide, 2.1 m extension over the transom
- A-Frame mounted hydraulic winch with 2,700 kg line pull and 45m Amsteel Blue
- 2.4 m x 8.5 m steel mounting plate for various winch configurations
- ISO locks for 10' or 20' TEU container
- HIAB deck crane 1,300 kg WLL, 2.4 m over port and starboard side
- Hydraulic davit, 2.4 m reach over starboard side, 450 kg WLL
- Multi-beam and USBL pole mounts (port and starboard)
- Two pot haulers
- Two manual davits 500 kg WLL each
- Optional hydraulic stern ramp with winch for small boat launch and recovery, A-Frame for extension out at 28 degrees
- Removable bulwark, port side, aft deck for support services
- CCTV camera system for working deck



Safety

- Safety management system
- Preventive maintenance program
- Ships' safety plan
- Firefighting/prevention plan
- Man overboard plan
- Abandon ships plan
- Muster stations and muster lists
- Firefighting equipment
- Two 20-man life rafts
- Zodiac RIB0450 (FRC) with 25 hp motor

Navigation and Communications

- Sperry marine radars X and Y band with AIS/DGPS compatible
- Electronic chart systems with back up plotter display
- Sailor VHF radios
- Dual VSAT
- SSB radio communications with GMDSS compatible
- AIS ship tracking system - receive and transmit
- HFMF radio telephone
- Wind and direction indicators
- Dual high wattage search lights
- Dual depth sounders
- GMDSS receiver
- Sperry gyro with repeaters throughout ship
- GMDSS Navtex receiver
- Auto directional finder
- Loudhailer microphone system with talk back
- Clearview windows with heaters



Office

Center for Ocean Ventures & Entrepreneurship
27 Parker St.
Dartmouth, NS, Canada 🇨🇦
B2Y 2W1

Inquiries



Jamie Sangster, P.Eng, MSc, CD
CEO
(902) 209-3119
contact@leewaymarine.ca

LeeWay
MARINE